



Guia de Atualização


TK ONU IP-D

Informações sobre atualização:

- Temos duas versões de atualização para modelo TK ONU-1P DUAL; Cada versão tem a sua atualização;
- Pode ser identificada pela interface WEB;
- Abaixo segue a especificação para atualização para cada versão; Os arquivos para atualizações estarão disponíveis em nosso site.



Atualização da ONU com interface WEB abaixo

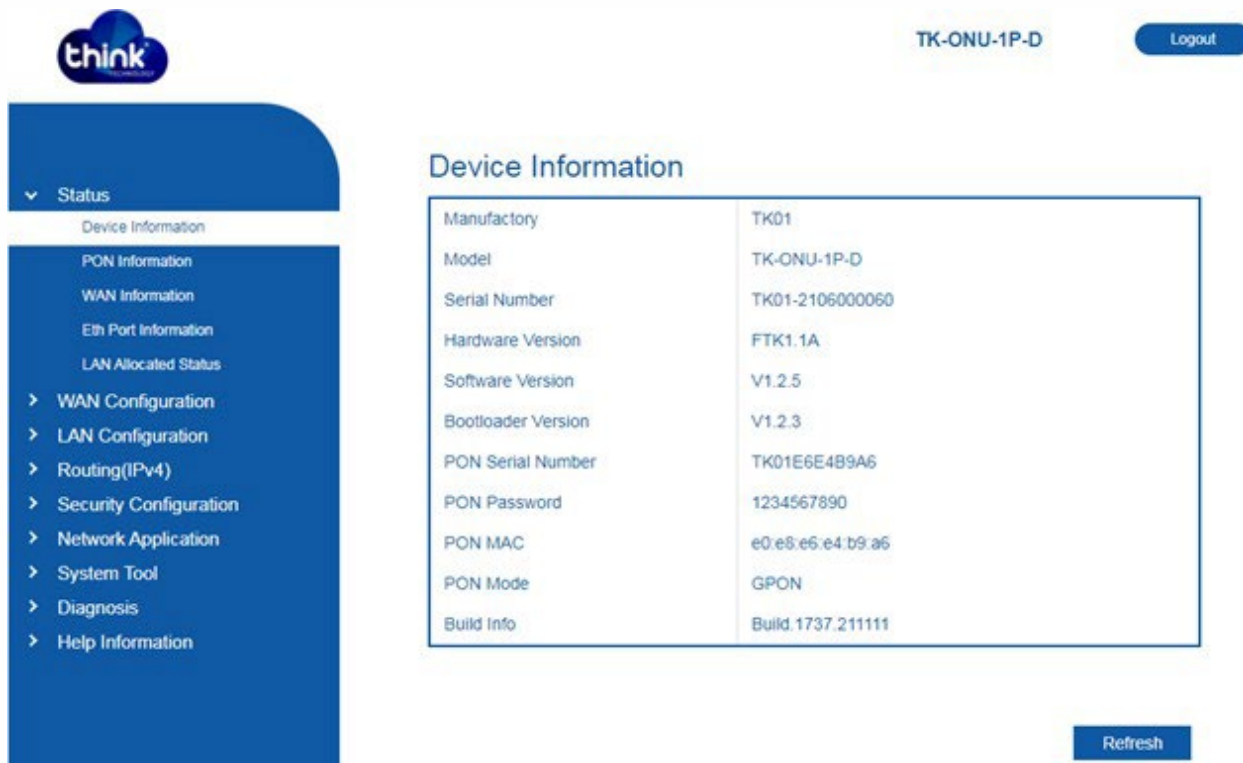


The screenshot shows the ThinkOptima web interface for a TK-ONU-1P-D device. The left sidebar contains a menu with the following items: Status (expanded), Device Information, PON Information, WAN Information, Eth Port Information, LAN Allocated Status, WAN Configuration, LAN Configuration, Routing(IPv4), Security Configuration, Network Application, System Tool, Diagnosis, and Help Information. The main content area displays the 'Device Information' table:

Manufactory	TK01
Model	TK-ONU-1P-D
Serial Number	TK01-2106000060
Hardware Version	FTK1.1A
Software Version	V1.2.5
Bootloader Version	V1.2.3
PON Serial Number	TK01E6E489A6
PON Password	1234567890
PON MAC	e0:e8:e6:e4:b9:a6
PON Mode	GPON
Build Info	Build.1737.211111

A 'Refresh' button is located at the bottom right of the table.

- Para a ONU com interface WEB acima, o firmware correto para a atualização é **FD511G_F_So8S_V1.2.6_220118_X157_WB**, segue o passo a passo para a atualização:



The screenshot shows the 'Upgrade the software' page in the ThinkOptima web interface. The left sidebar menu is expanded to 'System Tool', which includes Account, Login Timeout, Reboot, Configuration File, Firmware Upgrade (highlighted with a red box), and Led Control. The main content area features a 'Firmware File' input field with a file selection button labeled 'Escolher arquivo' (highlighted with a red box) and the text 'Nenhum arquivo escolhido'. Below the input field is an 'Upgrade' button (highlighted with a red box).

The screenshot shows the 'Device Information' page of the Think Technology web interface. The top navigation bar includes 'Status', 'Network', 'Security', 'Application', 'Administration', and 'Help'. The left sidebar contains 'Device Information', 'Network Interface', and 'User Interface'. The main content area displays a table with the following details:

Model	TK-ONU-1P-D
Serial Number	TK01-2007029547
Hardware Version	HZ650.1A
Software Version	V3.0.6-I157
Boot Loader Version	V3.0.4-I157
PON MAC	e0:e8:e6:2a:38:96
PON Mode	EPON
Build Info	Build.1133.201218

Buttons for 'Help' and 'Logout' are visible on the right side of the page.

- Para a ONU com interface WEB acima, o firmware correto para a atualização é **FD511G_Z_So8S_V3.0.7_210908_11559_X000_WB**, segue o passo a passo para a atualização.

The screenshot shows the 'Administration' page of the Think Technology web interface. The top navigation bar includes 'Status', 'Network', 'Security', 'Application', 'Administration', and 'Help'. The left sidebar contains 'User Management', 'System Management', 'Diagnosis', and 'Loopback Detection'. The 'Software Upgrade' option under 'System Management' is highlighted. The main content area displays a warning message: 'The device will reboot after upgrading.' Below this, there is a form with the text 'Please select a new software/firmware image' and a 'Choose file' button. An 'Upgrade' button is also present. Buttons for 'Help' and 'Logout' are visible on the right side of the page.

REVISÃO	DESCRIÇÃO	DATA
00	CRIAÇÃO DO DOCUMENTO	21/05/22