

Guia de visualização de IP


VIA SERIAL OLT CHASSI 3U

Informações sobre o procedimento


⚠ Em casos que o cliente não sabe, não lembra o IP do cartão de gerencia, o acesso deverá ser pelo serial;

1. Acesso via serial

1.1. Em Painel de Controle -> Gerenciamento de dispositivo verificar a porta COM em que seu PC conectou.

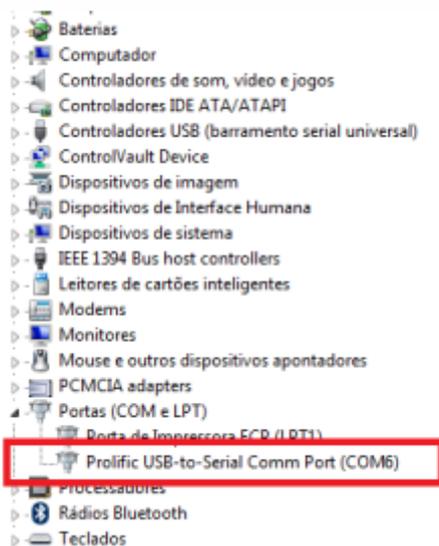

1.2. Identificar qual porta está conectado o seu cabo serial e colocar a velocidade da porta que será de: **115200**.

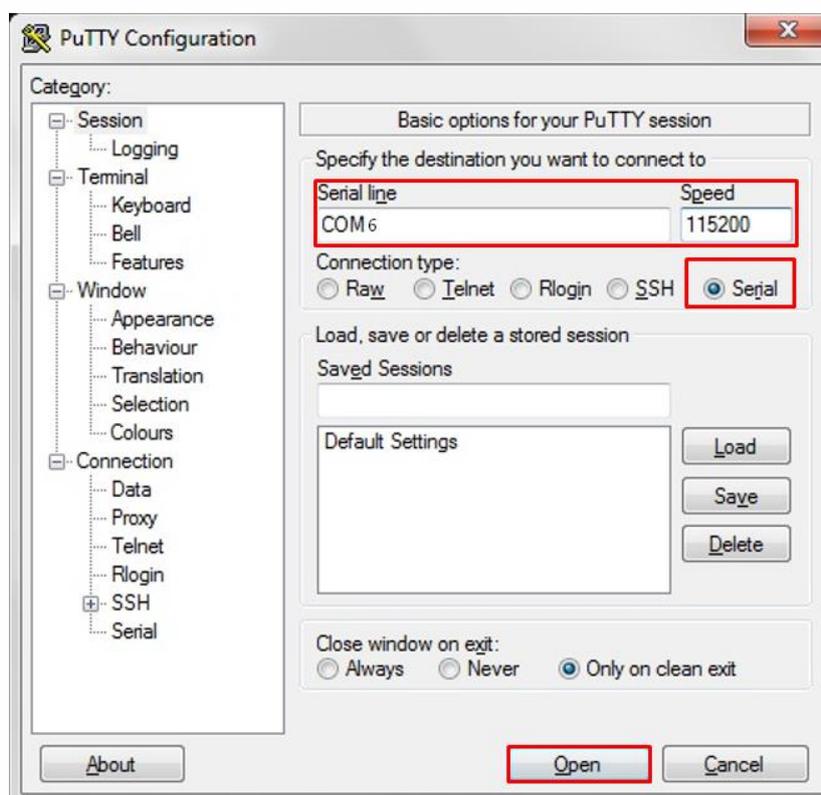

1.3. Comandos para visualizar o IP visualização do IP do cartão de gerência.

Access Verification ../

Access Password:

EPON> enable

Enable Password: admin

EPON# configure terminal

EPON(config)# mngshell

Shell Password: eponshell

bash-3.2# cd /mnt

bash-3.2# cat rc.sh

```
bash-3.2# cat rc.sh
#!/bin/bash
nms__ip=192.168.0.88
nms__gw=192.168.0.1
nmsmask=255.255.255.0
nmshwad=78:5c:72:a2:fb:75
host_ip=192.168.1.100
olt__ip=192.168.1.101
host_port=0x3721
olt__port=0x3721
inv__ip=0.0.0.0
nms__str=7000
model__str=TK7000
```

2. Controle de Revisão

REVISÃO	DESCRIÇÃO	DATA
00	CRIAÇÃO DO DOCUMENTO	21/10/21