

# Guia de Atualização da ONU TK-IP DUAL.

REV:00




 Indústria **Nacional**

## Informações sobre atualização

- Temos duas versões de atualização para modelo TK ONU-1P DUAL;
- Cada versão tem a sua atualização;
- Pode ser identificada pela interface WEB;
- Abaixo segue a especificação para atualização para cada versão;
- Os arquivos para atualizações estarão disponíveis em nosso site.



## Atualização da ONU com interface WEB abaixo

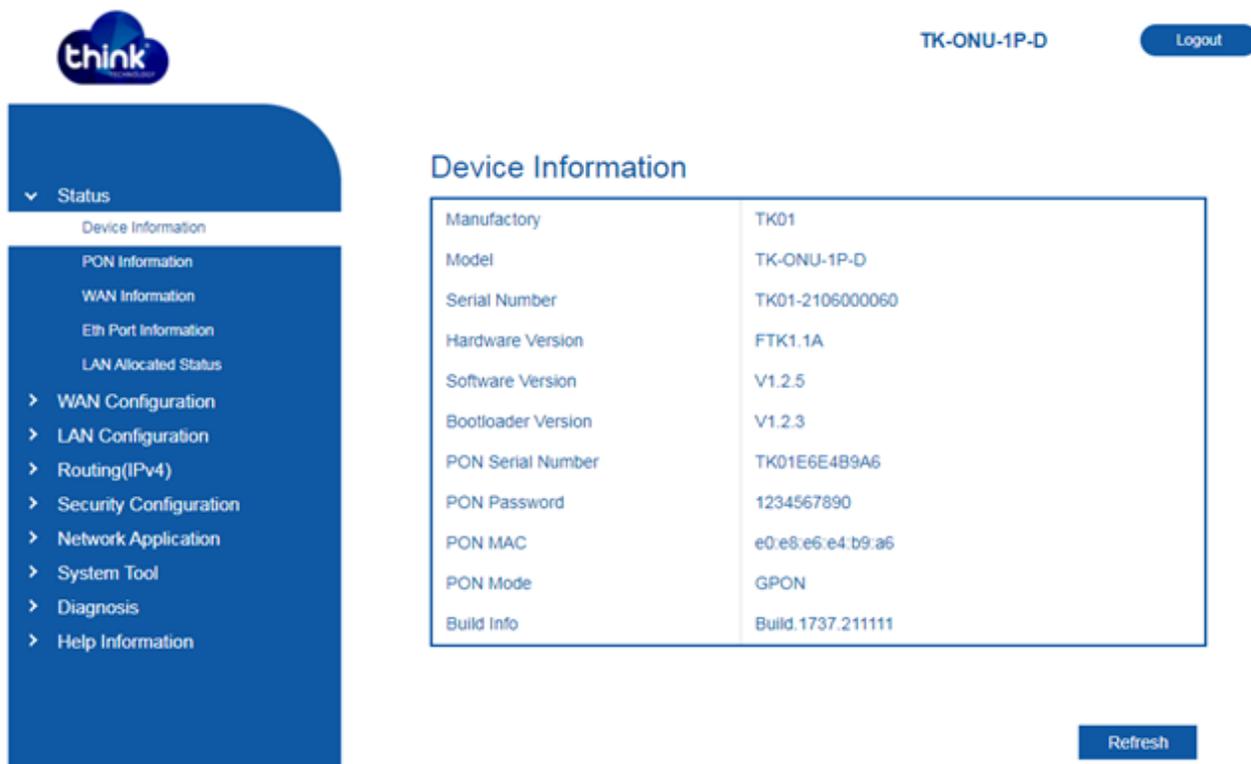


The screenshot shows the Think Technology web interface for a TK-ONU-1P-D device. The left sidebar contains a menu with the following items: Status (expanded), Device Information, PON Information, WAN Information, Eth Port Information, LAN Allocated Status, WAN Configuration, LAN Configuration, Routing(IPv4), Security Configuration, Network Application, System Tool, Diagnosis, and Help Information. The main content area is titled "Device Information" and displays the following data:

Manufactory	TK01
Model	TK-ONU-1P-D
Serial Number	TK01-2106000060
Hardware Version	FTK1.1A
Software Version	V1.2.5
Bootloader Version	V1.2.3
PON Serial Number	TK01E6E4B9A6
PON Password	1234567890
PON MAC	e0:e8:e6:e4:b9:a6
PON Mode	GPON
Build Info	Build.1737.211111

A "Refresh" button is located at the bottom right of the Device Information table.

- Para a ONU com interface WEB acima, o firmware correto para a atualização é FD511G\_F\_So8S\_V1.2.6\_220118\_X157\_WB, segue o passo a passo para a atualização.

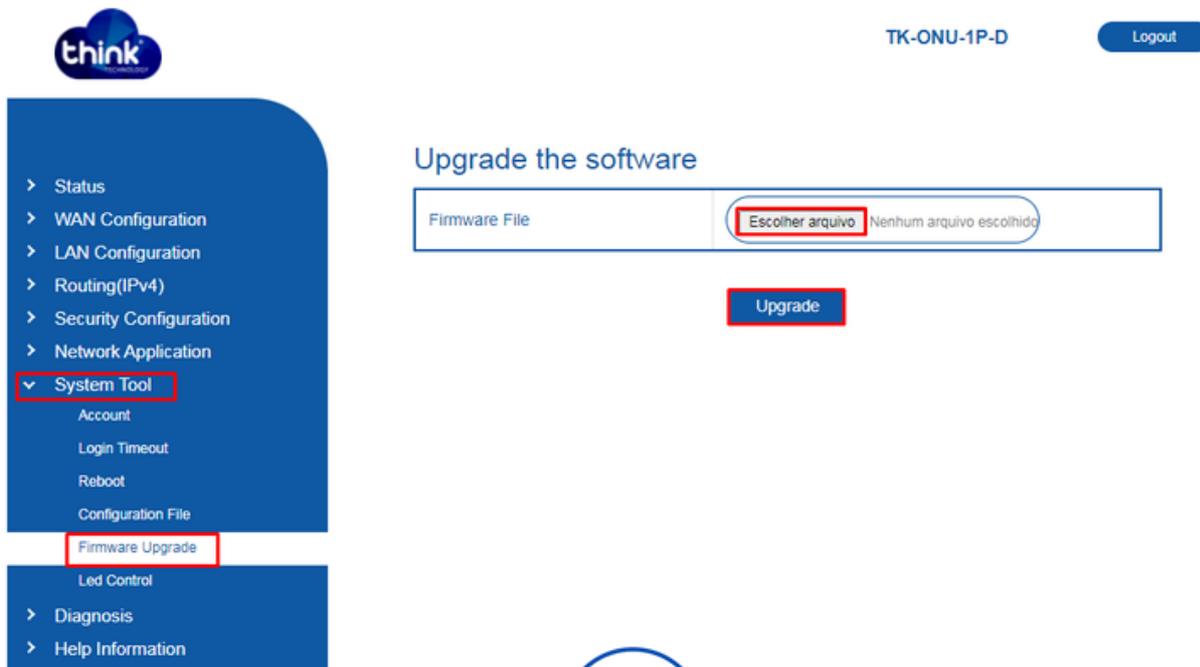

The screenshot shows the Think Technology web interface for a TK-ONU-1P-D device, specifically the "Upgrade the software" page. The left sidebar menu is expanded to "System Tool", which includes: Account, Login Timeout, Reboot, Configuration File, Firmware Upgrade (highlighted with a red box), and Led Control. The main content area is titled "Upgrade the software" and features a "Firmware File" input field with a file selection button labeled "Escolher arquivo" (highlighted with a red box) and the text "Nenhum arquivo escolhido". Below the input field is an "Upgrade" button (highlighted with a red box).



## Atualização da ONU com interface WEB abaixo

The screenshot shows the Think Technology web interface for a TK-ONU-1P-D device. The top navigation bar includes Status, Network, Security, Application, Administration, and Help. The left sidebar has sections for Device Information, Network Interface, and User Interface. The main content area displays a table of device specifications:

Model	TK-ONU-1P-D
Serial Number	TK01-2007029547
Hardware Version	HZ650.1A
Software Version	V3.0.6-I157
Boot Loader Version	V3.0.4-I157
PON MAC	e0:e8:e6:2a:38:96
PON Mode	EPON
Build Info	Build.1133.201218

Buttons for Help and Logout are visible on the right side of the table.

- Para a ONU com interface WEB acima, o firmware correto para a atualização é FD511G\_Z\_So8S\_V3.0.7\_210908\_11559\_X000\_WB, segue o passo a passo para a atualização.

The screenshot shows the Think Technology web interface for a TK-ONU-1P-D device, specifically the Administration section. The top navigation bar includes Status, Network, Security, Application, Administration, and Help. The left sidebar has sections for User Management, System Management, and Diagnosis. The main content area displays a warning message: "The device will reboot after upgrading." Below the warning is a form for selecting a new software/firmware image. The form includes a text input field, a "Choose file" button, and an "Upgrade" button. Buttons for Help and Logout are visible on the right side of the form.



Quaisquer dúvidas, estaremos a sua inteira disposição nos contatos abaixo.

**Contato para Suporte Técnico**

E-mail: [suporte@tkth.com.br](mailto:suporte@tkth.com.br)

Site: [www.tkth.com.br](http://www.tkth.com.br)

**Telefones:**

+55 35 3473-0762

+55 35 3473-2021 (Whatsapp)

+55 35 3473-2022

